















Joining 12-72mm carrier tape with **FC1272B Joint Tape**

<p>For 12mm emboss carrier tape</p> <p>R side Cover tape side  Back side </p> <p>L side: Refer to Procedure of 12mm</p> <p>← Feeding direction</p>	<p>For 12mm emboss carrier tape</p> <p>R side: Refer to Procedure of 16mm  </p> <p>L side: Refer to Procedure of 24mm</p> <p>← Feeding direction</p> <p>Stick separated Joint Tapes on the backside of a pocket.</p>
<p>For 16mm emboss carrier tape</p> <p>R side  </p> <p>L side: Refer to Procedure of 16mm</p> <p>← Feeding direction</p> <p>Stick separated the Joint Tape on the backside of a pocket.</p>	<p>For 56mm emboss carrier tape</p> <p>R side: Refer to Procedure of 24mm  </p> <p>L side: Refer to Procedure of 24mm</p> <p>← Feeding direction</p> <p>Stick separated Joint Tapes on the backside of a pocket.</p>
<p>For 24mm emboss carrier tape</p> <p>R side  </p> <p>L side: Refer to Procedure of 24mm</p> <p>← Feeding direction</p> <p>Stick separated the Joint Tape on the backside of a pocket.</p>	<p>For 72mm emboss carrier tape</p> <p>R side: Refer to Procedure of 24mm  </p> <p>L side: Refer to procedure of 24mm</p> <p>← Feeding direction</p> <p>Stick separated Joint Tapes on the backside of a pocket.</p>
<p>For 32mm emboss carrier tape</p> <p>R side: Refer to Procedure of 16mm  </p> <p>L side: Refer to Procedure of 16mm</p> <p>← Feeding direction</p>	
<p>Note:</p> <p>※ Release-agent coating onto the cover tape may cause to weaken tape joint adhesion. Use a proper release-agent if coating required</p>	

Product name	Product No	Quantity
<i>Fuji Joint Tape</i>	FC1272B	1,000pieces (500x2)

Sold throughout Europe & USA by:

Mid America (UK) Ltd

Hill House, Rockfield, Tain, Ross-shire
IV20 1RF, UK

Tel: 44 1862 871 555

Fax: 44 1862 871 666

Email: mauk@btconnect.com




FC1272B


www.mauksmt.com

Joining 12mm embossed carrier tape using Fuji FC1272B Joint Tape


① Cut a carrier tapes as below.

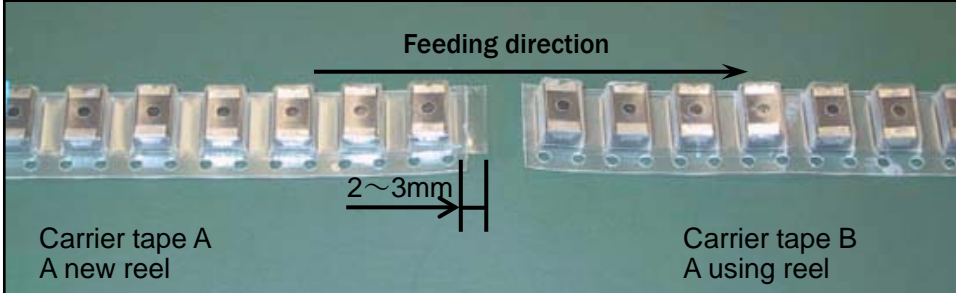


② Separate from a positioning guide of the Joint Tape by hand.

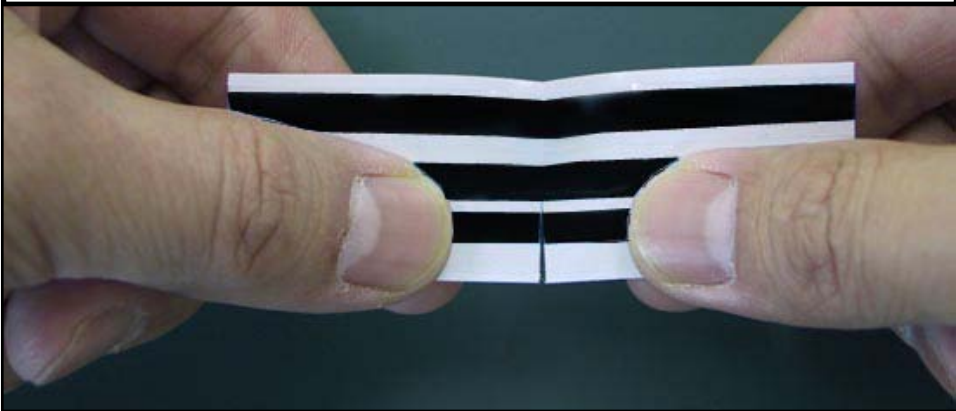

③ Peel a white cover of the Joint Tape up to a positioning guide.

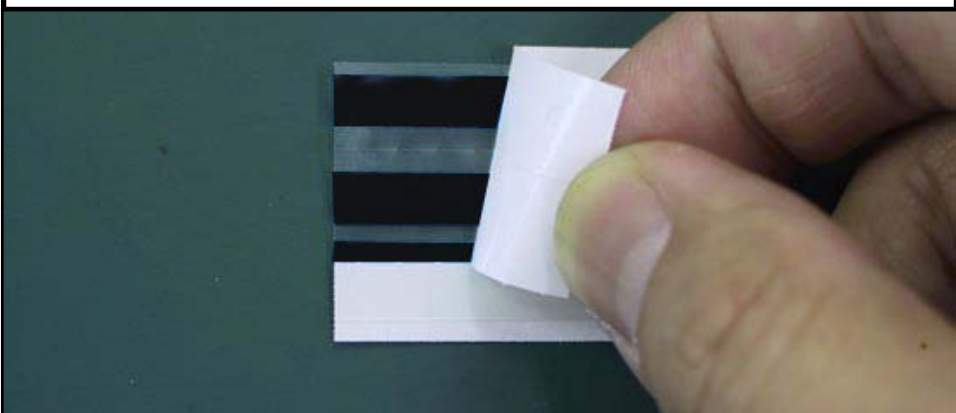


④ Set a carrier tape A on a positioning guide, and stick the cover tape downward on center of the Joint Tape
(A row of feeding holes must be along a guide line.)

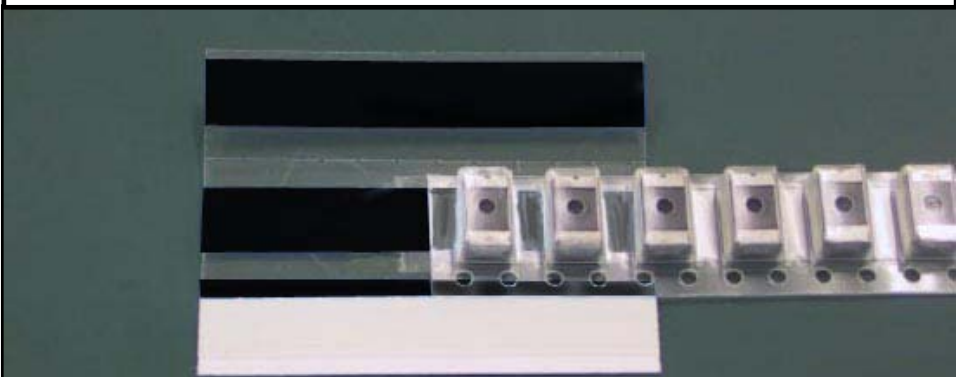


⑤ Stick a carrier tape B setting it on a positioning guide and setting its cut end on a carrier tape A




⑥ Bend the Joint Tape along a bending line and stick it on backside of a carrier tape.

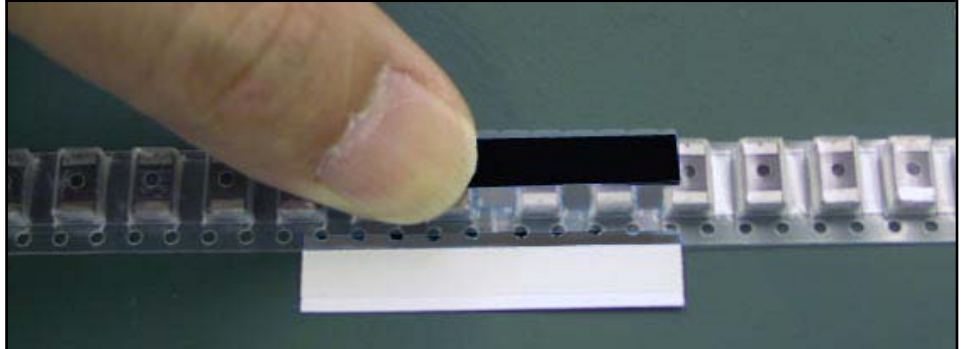


⑦ Peel a white cover and a positioning guide of the Joint Tape

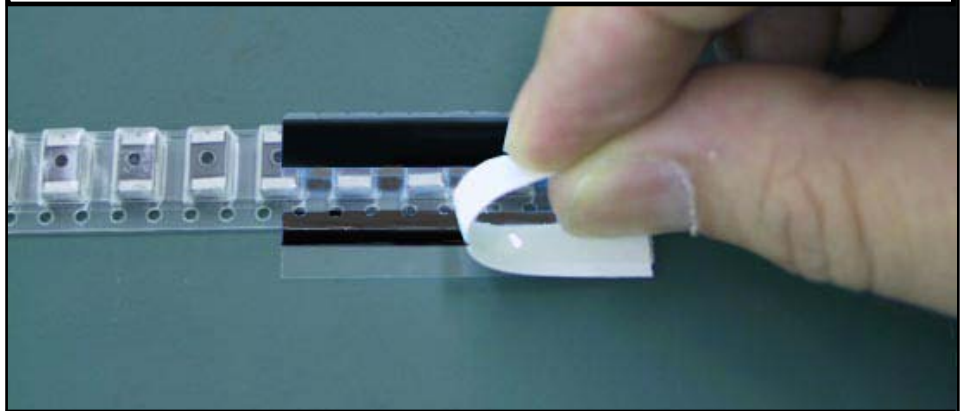


⑧ Bend the Joint Tape along a bending line and stick it on feeding holes side

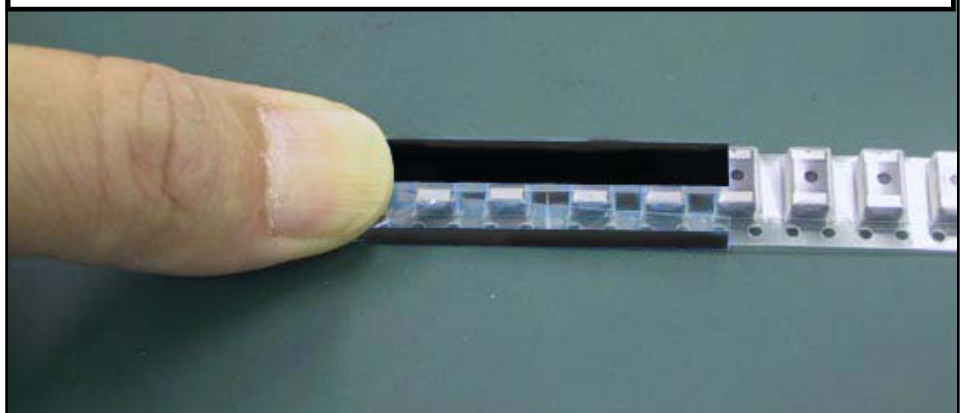

⑨ Peel a transparent tape from L side to R side of the Joint Tape.

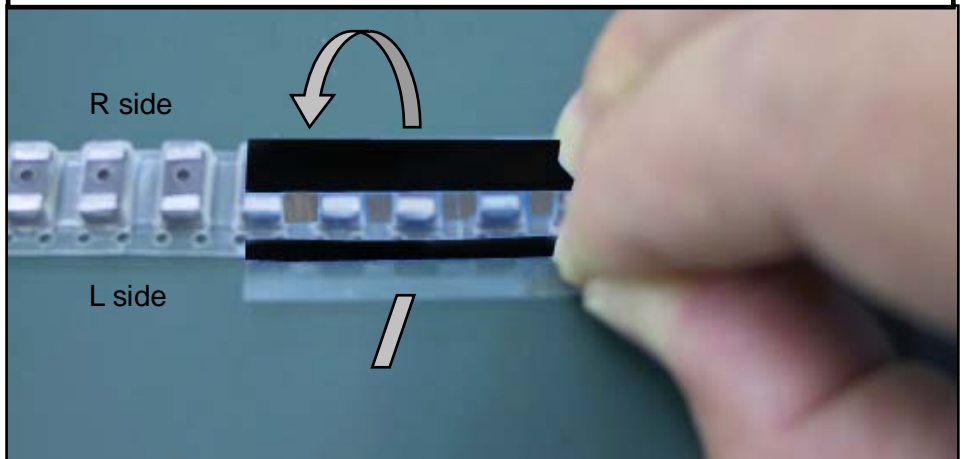


⑩ All completed.
※Be sure a black sticks completely to the carrier tape.

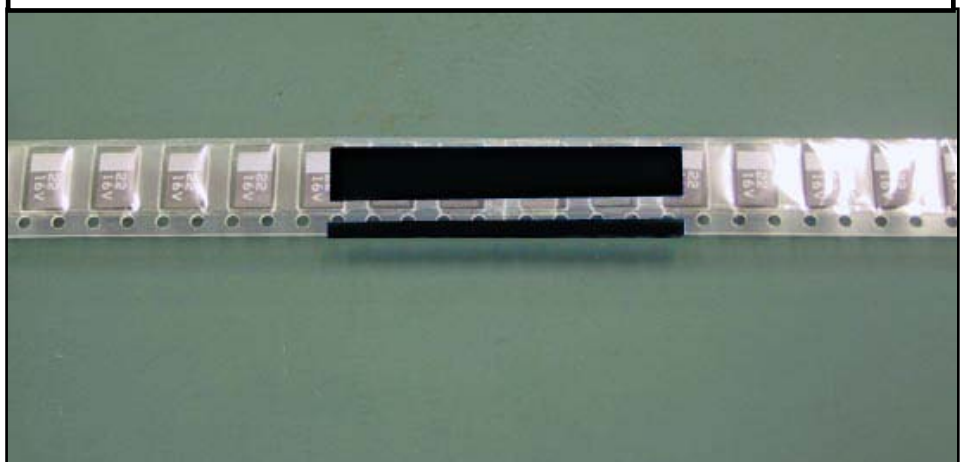


Joining 16mm embossed carrier tape using Fuji FC1272B Joint Tape

① Cut a carrier tapes as below

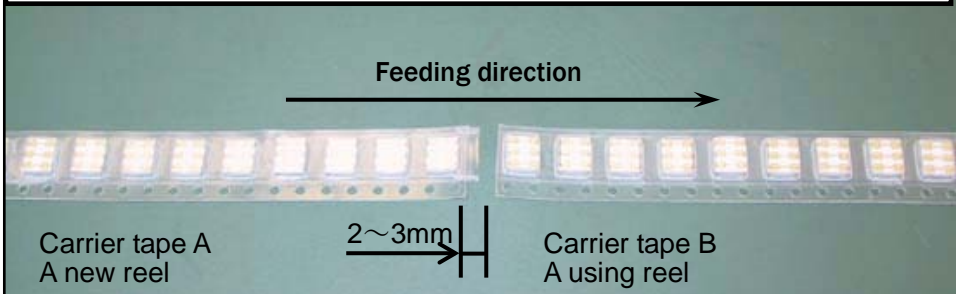


② Separate from a positioning guide of the Joint Tape by hand.

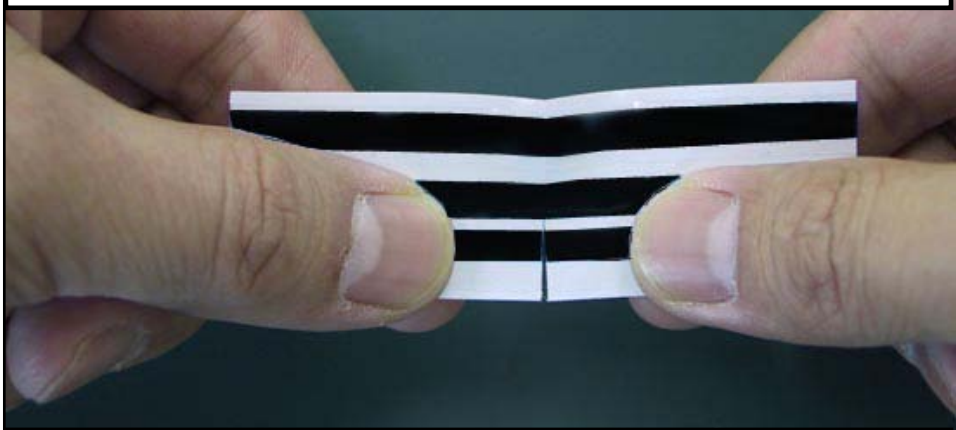

③ Separate a top part of the Joint Tape



④ Peel a white cover of the Joint Tape up to a positioning guide.

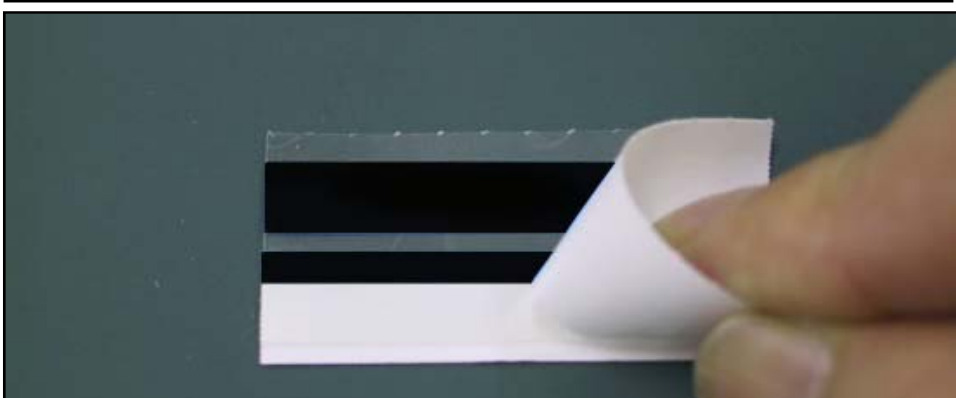

⑤ Set a carrier tape A on a positioning guide, and stick the cover tape downward on center of the Joint Tape (A row of feeding holes must be along a guide line.)



⑥ Stick a carrier tape B setting it on a positioning guide and setting its cut end on a carrier tape A




⑦ Peel a white cover and a positioning guide of the Joint Tape




⑧ Bend the Joint Tape along a bending line and stick it on feeding holes side



⑨ Peel a transparent tape from L side to R side of the Joint Tape.

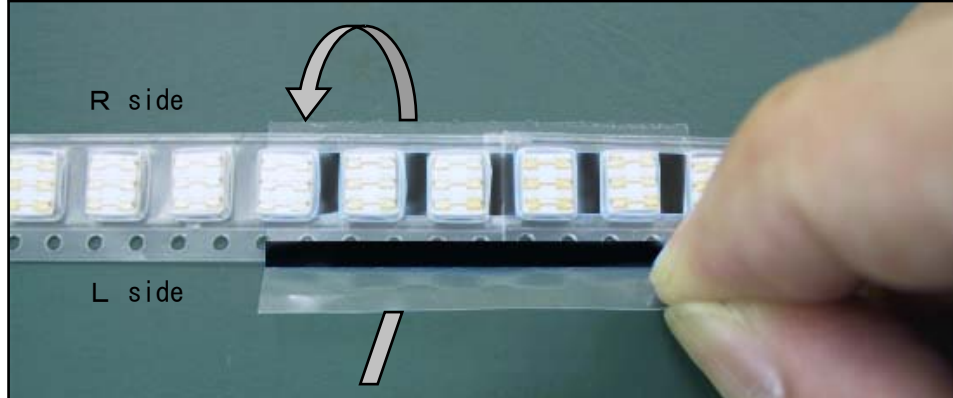

⑩ All completed
※Be sure a black sticks completely to the carrier tape.

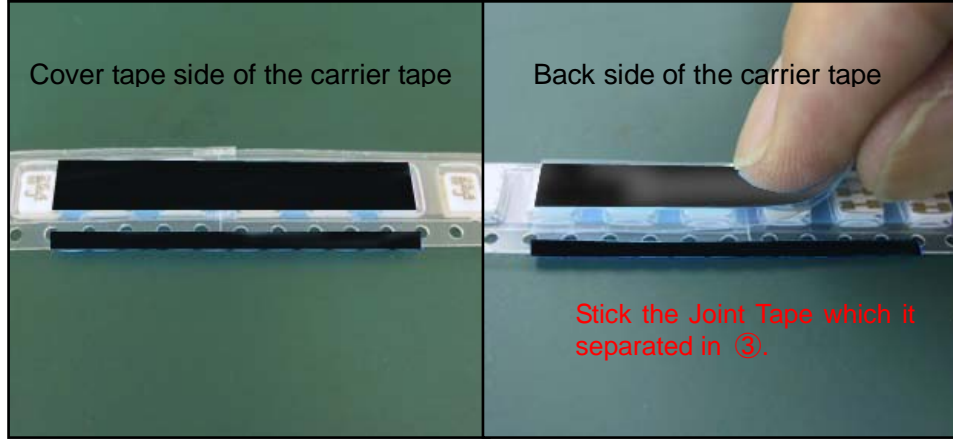

Sold in Europe & USA by:


Mid America (UK) Ltd
tel: 44 1862 871 555
fax: 44 1862 871 666
email: mauk@btconnect.com

Hill House, Rockfield, Tain, IV 20 1RF, Scotland, UK


www.mauksmt.com

FC1272B PROCEDURE (For 24mm emboss carrier tape)


① Cut a carrier tapes as below

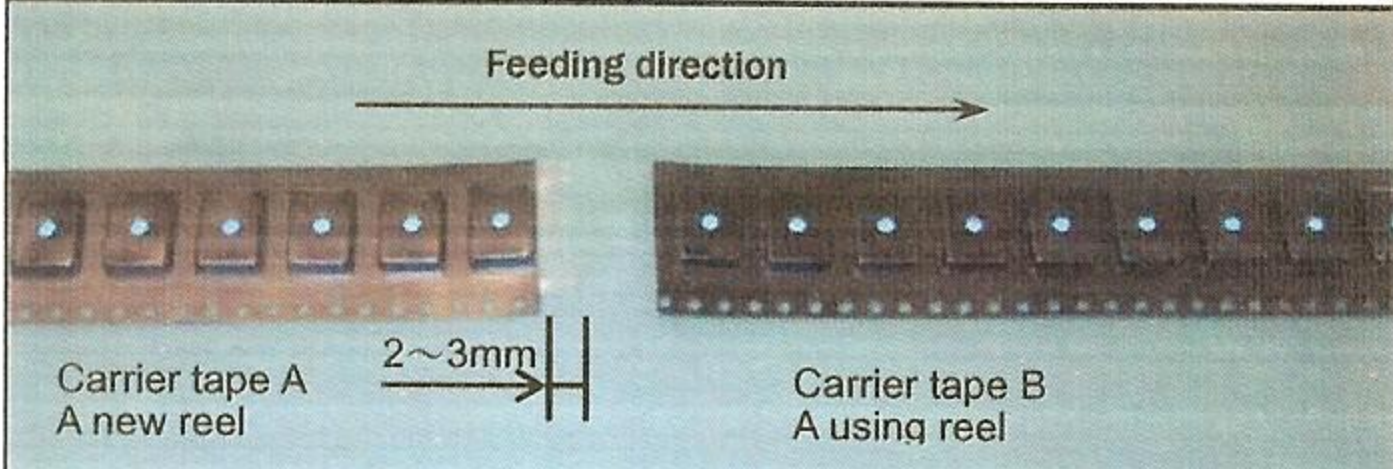


② Separate from a positioning guide of the Joint Tape by hand.

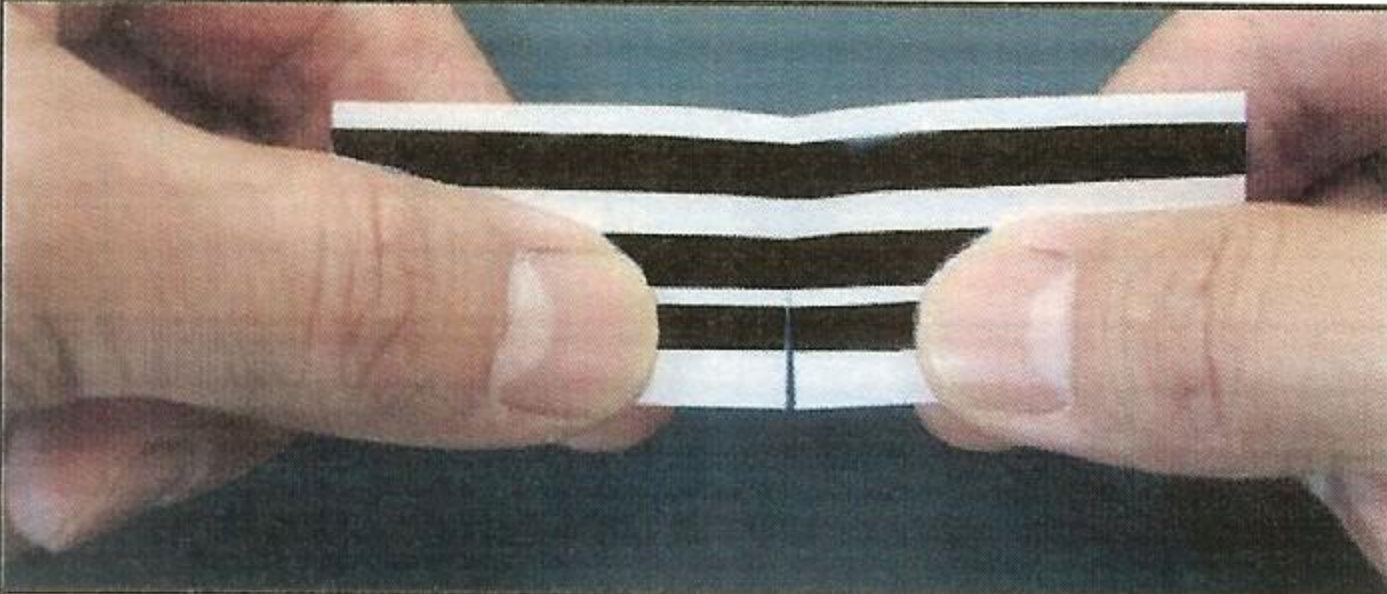

③ Peel a white cover of the Joint Tape up to a positioning guide.

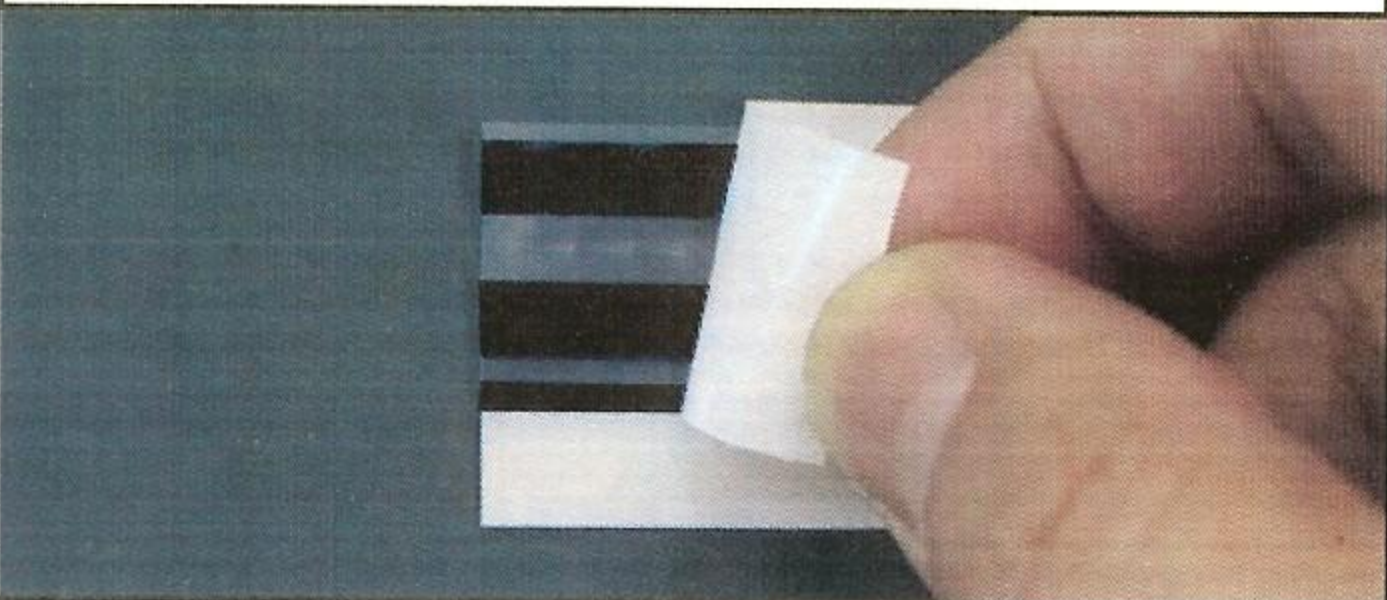


④ Set a carrier tape A on a positioning guide, and stick the cover tape downward on center of the Joint Tape (A row of feeding holes must be along a guide line.)

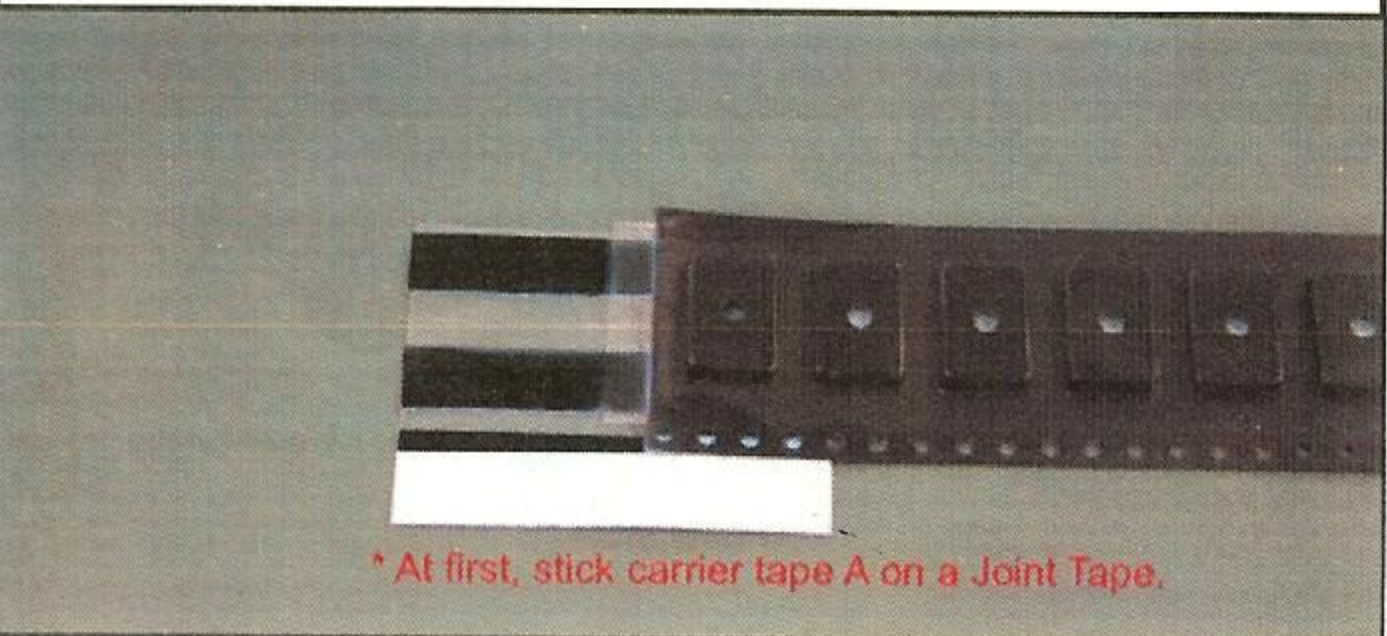


⑤ Stick a carrier tape B setting it on a positioning guide and setting its cut end on the carrier tape A




⑥ Stick a joint tape on the cover tape

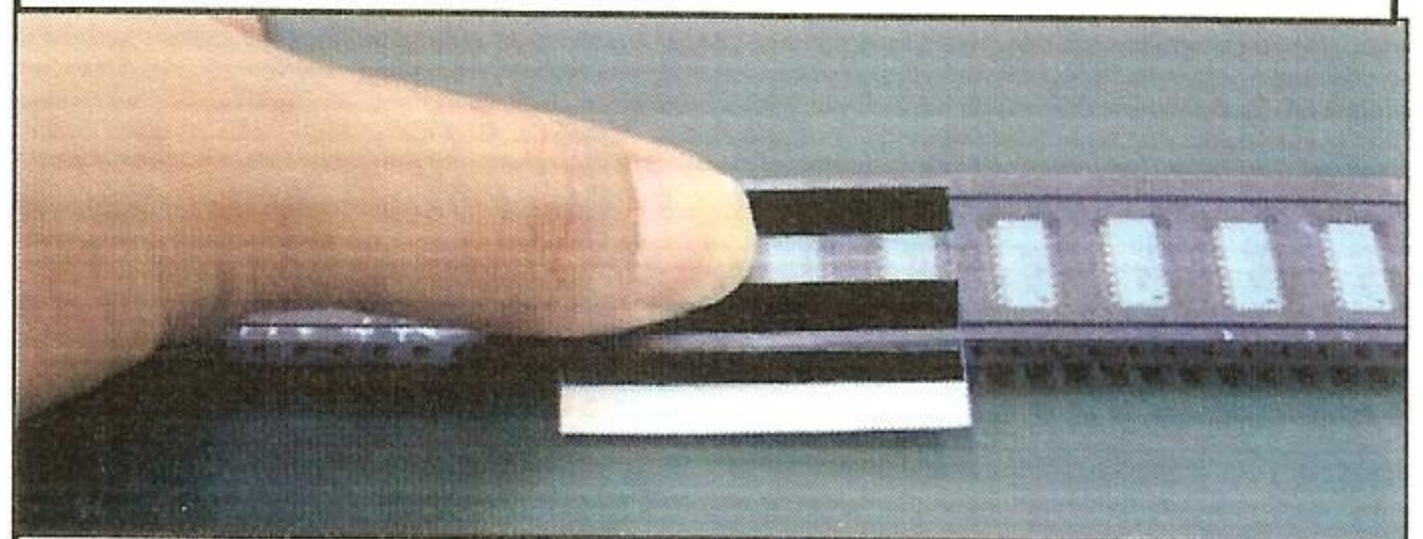


⑦ Peel a white cover and a positioning guide of the Joint Tape

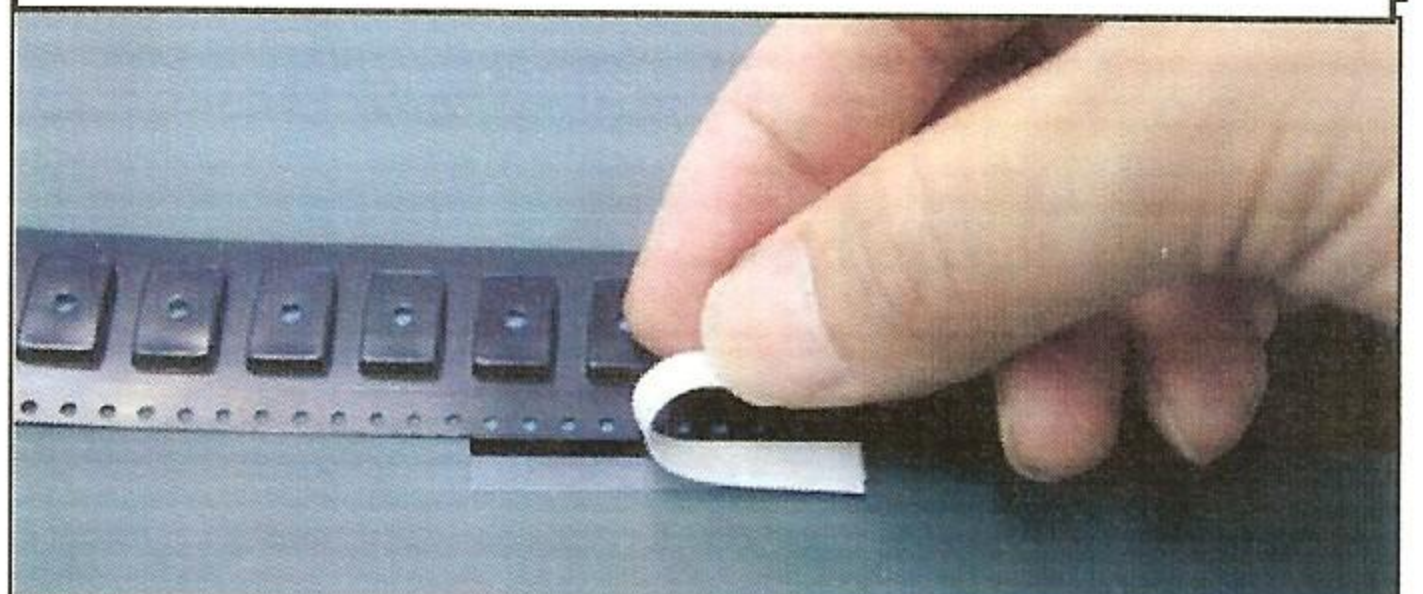

⑧ Bend the Joint Tape along a bending line and stick it on feeding holes side

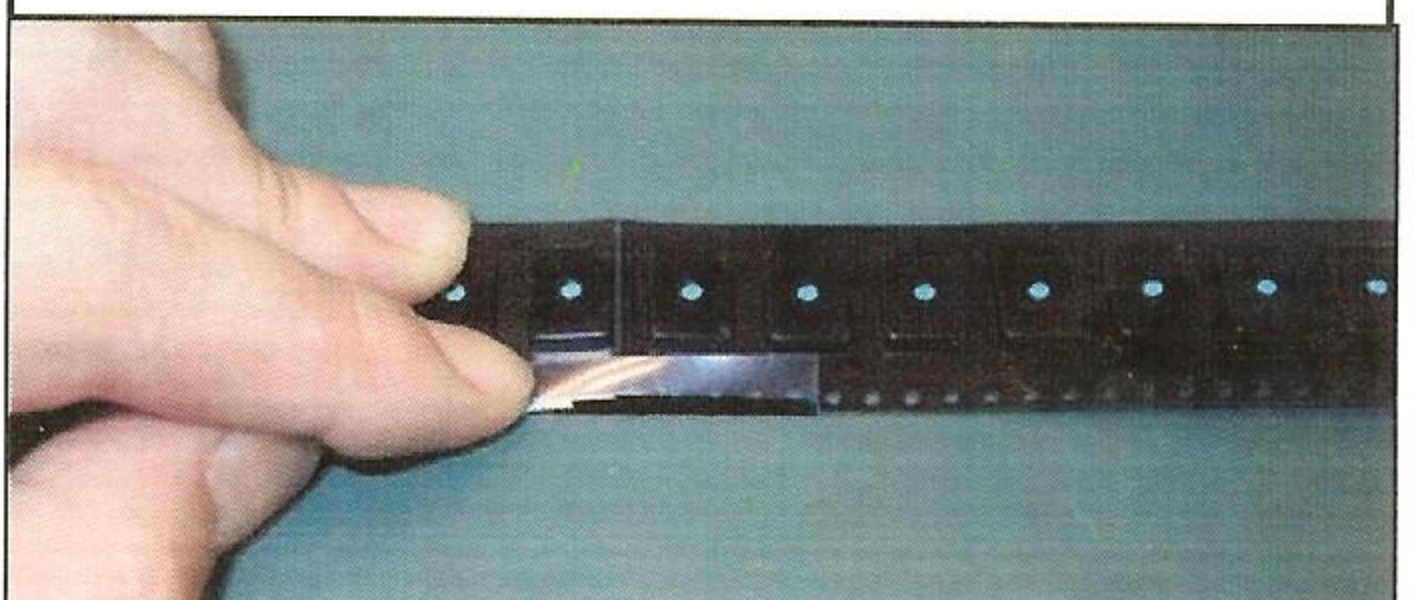

⑨ Peel a transparent tape from L side to R side of the Joint Tape.

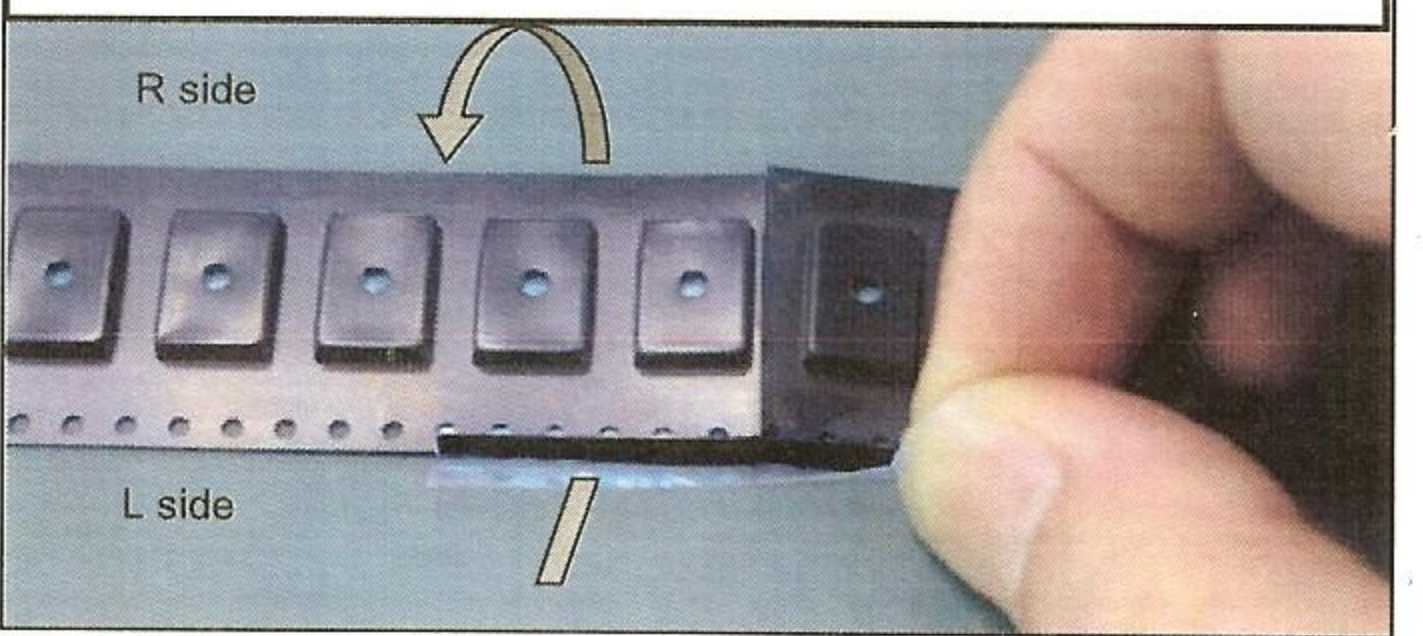

⑩ All completed
※Be sure a black sticks completely to the carrier tape.

